




Southern Ballistic Research, LLC
 140 Indigo Dr
 Brunswick, GA 31525
 (912) 264-5822 Fax (912) 264-5888
 info@SBR-USA.com
 www.SBR-USA.com
 CAGE Code: 4R7D8

OCT 2018

CALIBER: .308 WIN (7.62x51mm)
CARTRIDGE: Armor Piercing Tactical M-Series (M175)

Manufactured to U.S. Military Specifications MIL-STD-636, and SAAMI

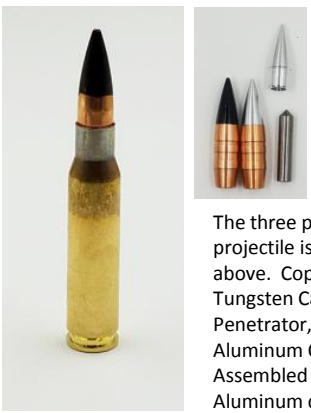

The three piece projectile is shown above. Copper jacket, Tungsten Carbide Penetrator, and Aluminum Cap. Assembled projectile. Aluminum cap blackened

The M-Series is a high performance Armor Piercing cartridge. It utilizes a Tungsten Carbide core penetrator and use for high threat targets. Affective against light armor.

BULLET: 11.3g (175 grains) Copper outer jacket body Tungsten Carbide penetrator core.

BC (G1): 0.500

VELOCITY: **
 790 m/s
 2595 ft/s

ACCURACY: **
 <1.0 MOA @ 100 yards
 Mean Radius: 0.50 MOA @ 100 yards

PENETRATION:
 16mm HB400 @ 100 yds

CHAMBER PRESSURE:
 Average Maximum: 62,000 psi (SAAMI)

CASE: Brass Copper Alloy (#260)

PRIMER: Boxer Style, Non-Corrosive

TIP ID: Black

PRIMER SEALANT: Yes. UV US DoD Mil Spec

CASE MOUTH SEALANT: Yes, UV US DoD Mil Spec

HEADSTAMP: Starline with caliber or SBR with caliber



PROPELLANT DETECTION: 100% mechanical and/or electrical detection of propellant levels within the cartridge

**Cartridge base velocities and accuracy are tested using SAAMI test barrels in a ballistic lab setting. These values can be changed based on actual weapons used and other environment factors. We can test velocities and perform MOA accuracy testing on the specific weapon platforms.

Specifications can change without notice. Custom loading to meet customer requirements is available